



ENGINE DRIVEN



# Big Blue® 800X Air Pak<sup>™</sup> with ArcReach Technology

Part No: MR907763-1 [Dual VRD]

## Dual Operator. Increased Efficiency. More Power.



**DON'T  
WALK WELD<sup>™</sup>**

**GAME-CHANGING TECHNOLOGIES CAN STOP  
YOU FROM WASTING HOURS EVERY DAY.**

ArcReach welding technology minimises the non-value-added time spent walking to and from the power source - and maximises arc-on time, weld quality and job site safety.

### APPLICATIONS

Pipe Welding  
Maintenance & Repair Rigs  
Mechanical Contractor  
Construction  
Mining Maintenance  
Railroad Maintenance

### PROCESSES

Stick (SMAW)  
MIG (GMAW)  
Flux-Cored (FCAW)  
RMD\*  
Pulsed MIG\* (GMAW-P)  
DC TIG (GTAW)  
Submerged Arc (SAW)  
Stud Welding (13mm)  
Air Carbon Arc (CAC-A)  
(13mm)

\*With optional ArcReach Smart Feeder



welding.com.au 1300 300 884

**ENGINE DRIVEN**

# Big Blue® 800X Air Pak with ArcReach Technology

Part No: MR907763-1 [Dual VRD]

## THE MOST POWERFUL DIESEL GENERATOR IN THE INDUSTRY!

### MORE POWER

800 Amps of weld power and 27,000 watts of peak generator power.

### MULTI-ARC WELDING

> One dependable engine — two independent arcs with up to 400 Amps each. Or plug in an additional inverter for a true multi operator work platform!

> **Example:** Two additional XMT multi-process machines equals 4 operators, up to 200 Amps each. Premium quality arcs allow operators to work independently with no arc interaction. Multi operator welding has never been easier or more versatile.



### INGERSOLL RAND

> Ultra-reliable industrial rotary screw compressor.  
> 30,000-hour life expectancy.  
> Independent on/off control for applications not requiring compressed air — allows greater fuel savings and longer compressor service intervals.

### AUTO REMOTE SENSE™

Standard 14-pin receptacle. For simple connection of remote controls and wire feeders.

### HD POWDER COAT

With zinc-rich primer protects sheet metal from rust and corrosion.

### INCREASED EFFICIENCY

> More arcs and better fuel economy equal increased profits for your business.  
> Estimated savings are 34 percent with a dual-operator unit versus two single operator units.

### DIGITAL METERS

SunVision technology enables welding parameters to be viewed with greater clarity than analogue meters at virtually any angle. Meters can be seen clearly even in direct sunlight.

### INDUSTRIAL USB PORT

Quickly upload the latest software and download machine log files to retrieve in-depth information such as diagnostics and machine statistics.

### AUXILIARY POWER\*

> 1 x 415-380V 32 Amp Sockets.  
> 2 X 240 V 15 Amp Sockets.  
> RCD.

### MODEL OPTIONS & UPGRADE PACKAGES

### PART NO

<b>Standard Machine Package</b> - Dual VRD	MR907763-1
<b>Basic Upgrade Package</b> - Dual VRD, Emergency Stop, Double Pole Battery Isolator & Lockout Device	MR907763-2
<b>Full Upgrade Package</b> - Dual VRD, Roll Frame & Spill Tray Assembly, Emergency Stop, Double Pole Battery Isolator & Lockout Device	MR907763-3

### ARC CONTROL

Beneficial when welding with stick and solid wires for easier fine tuning of tough-to-weld materials and out-of-position applications.

### SIMPLE PARALLELING SWITCH

Makes switching from a single operator to dual operators a breeze. Weld up to 400 Amps per side when set up in dual-operator mode, or up to 800 Amps in single-operator mode.

### 20,000 WATTS OF PURE GENERATOR POWER

Plug in an extra Miller inverter-based power source for a second welding arc.

### HEAVY-DUTY LOW SPEED T4I INDUSTRIAL DIESEL ENGINES

\*Generator auxiliary power is 60Hz, and intended for operating equipment associated with welding, such as angle grinders, drills and floodlights. Some Australian 50Hz equipment incorporating induction motors, such as pumps, fans, air compressors, refrigeration or air-conditioners, may not operate correctly and could be damaged. Refer to appliance supplier or manufacturer to confirm suitability.



### ELECTRONIC ENGINE DISPLAY

Simultaneously displays fuel level, engine hours, coolant temperature, oil pressure, battery volts, engine rpm, and air pressure. It also tracks oil change intervals, compressor hours, and displays engine diagnostics for quick and easy servicing.

### STANDARD FEATURES

> ArcReach.  
> Digital preset weld meters.  
> Automatic idle.  
> Vandalism lockout.



welding.com.au 1300 300 884

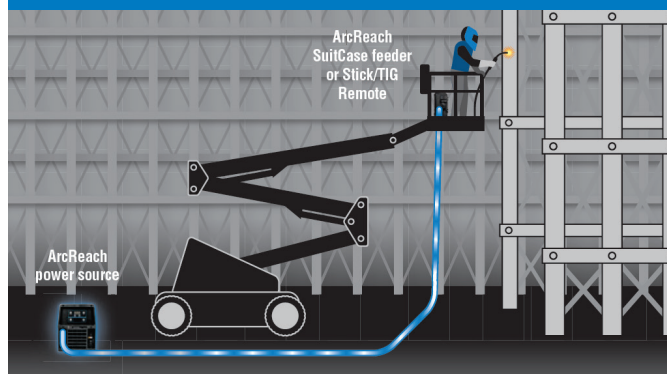
**ENGINE DRIVEN**

# Big Blue® 800X Air Pak with ArcReach Technology

Part No: MR907763-1 [Dual VRD]

**ArcReach®****REMOTE CONTROL OF  
THE POWER SOURCE  
WITH A CONTROL CORD**

ArcReach technology uses the existing weld cable to communicate welding control information between the feeder or remote and power source. This technology eliminates the need for control cords, and their associated problems and costs.

**MORE WELDS IN LESS TIME**

## **MORE ARC-ON TIME & REDUCED EXPOSURE TO WORKPLACE HAZARDS**

Less time is spent going back to the welding power supply to set process and arc amperage or voltage.

## **AUTO-PROCESS SELECT™**

Depending on connected accessory, the system automatically changes to stick or MIG/FCAW (with gas) if electrode positive polarity is detected or TIG or FCAW (no gas) if electrode negative polarity is detected, when ArcReach communication is established between the accessory and the Big Blue —reducing the need to access the power supply.

## **LESS OPERATOR FATIGUE**

Operators no longer need to move or reposition heavy secondary weld leads bundled with control cords on the job site because control cables are not used.

## **AUTOMATIC RETURN TO PANEL SETTINGS**

System automatically returns to Big Blue setting when ArcReach communication is terminated. For example, if the Big Blue is set to gouging at 500 Amps and an ArcReach feeder is connected, the Big Blue will go to a MIG/FCAW process. If the feeder is disconnected, the Big Blue will go back to its previous setting (gouging at 500 Amps).

**FEWER CABLES  
TO MAINTAIN**

## **SAVE TIME**

Operators no longer need to troubleshoot welding system problems that result from damaged control cords.

## **ELIMINATE COSTLY CONTROL CORD REPAIRS**

Because control cords are not used.

**FLEET  
COMPATIBILITY**

## **CROSS PLATFORM COMPATIBLE**

The same ArcReach accessories that work on engine-driven equipment can also be used on select ArcReach-equipped XMT® and PipeWorx 350 FieldPro™ power sources.

## **REVERSE COMPATIBLE**

ArcReach-equipped power sources work with non-ArcReach accessories; however, the complete ArcReach benefit is only realised with the ArcReach system.

**BETTER WELDS WITH LESS REWORK**

## **OPERATORS CAN PRECISELY SET ARC AMPERAGE OR VOLTAGE**

Operators can set the Amperage and voltage at the weld joint and monitor the actual arc voltage and current delivered to the weld using the digital meters on the accessory. This removes guesswork when it comes to adhering to weld procedures.

## **REMOTE OVERRIDE OF BIG BLUE**

When an ArcReach accessory is connected to a Big Blue the accessory has full control and the Big Blue controls are disabled. While under ArcReach control, process and voltage/ amperage adjustments are locked out, preventing accidental changes by personnel other than the welding operator.



welding.com.au 1300 300 884

**ENGINE DRIVEN**

# Big Blue® 800X Air Pak with ArcReach Technology

Part No: MR907763-1 [Dual VRD]



## ARCREACH SUITCASE 12 FEATURES

### SETTING THE STANDARD FOR PERFORMANCE

Heavy-duty drive motor with tachometer control provides wire feed speed that is accurate and consistent from the start of the weld to the finish and from one weld to the next, which provides consistent arc quality. Front panel has trigger hold, wire jog, and gas purge for easy operator access. Wide voltage range for small and large wires with no contactor chatter or arc outages.

### SET VOLTS & WIRE SPEED FEED REMOTELY

The simple interface on the feeder allows operators to adjust parameters at the point of use with no control cords.

### EASY PROCESS CHANGEOVER

Simply connect the ArcReach SuitCase feeder to your weld lead and you are ready to go. The power source automatically switches settings to run conventional wire processes.

### EASY SOLUTION FOR TRADITIONAL WIRE PROCESS

Add the flux-cored capability of the Big Blue 800X Air Pak for fill and cap passes for increase productivity.

### DURABLE DESIGN REDUCES DOWNTIME

Impact-resistant case and the elimination of feeder control cords provides a solid solution to last in harsh environments.



## ARCREACH SMART FEEDER FEATURES

### ARCREACH SMART FEEDER DELIVERS EXCELLENT RMD & PULSED MIG WELDING

Up to 60 metres away from the power source with no control cords - twice the distance previously possible. RMD and pulsed MIG processes also help reduce weld failures and eliminate backing gas on some stainless and chrome-moly applications.

### EASY PROCESS CHANGEOVER

Simply connect the ArcReach Smart Feeder to your leads and you are ready to go. All controls automatically shift to the ArcReach Smart Feeder.

### SYNERGIC PROCESSES

RMD and pulsed MIG welding permits procedures with one wire and one gas to eliminate process switch-over time.

### DURABLE DESIGN REDUCES DOWNTIME

Impact-resistant case and the elimination of feeder control cords provides a solid solution to last in harsh environments.



## ARCREACH STICK/TIG REMOTE

### COMPLETE REMOTE CONTROL

Portable and lightweight, the ArcReach® Stick/TIG Remote paired with an Big Blue 800X Air Pak power source allows you to change weld settings at your work area, saving a trip to the power supply. No extra control cord to purchase, maintain, string or unstring — saving time and money.



welding.com.au 1300 300 884





# Big Blue<sup>®</sup> 800X Air Pak with ArcReach Technology

Part No: MR907763-1 [Dual VRD]



## PRODUCT SPECIFICATIONS

WELD. MODE	OUTPUT MODE	WELD OUTPUT RANGE	WELD OUTPUT RATED AT 40° C	MAX OPEN CIRCUIT VOLTAGE	GENERATOR POWER OUTPUT RATED AT 40° C***	DIM. (MM)	WEIGHT* (WITHOUT FUEL)
CC/DC (Stick/TIG)	Separate (Dual Outputs)	20 – 400 A	400 A at 36 V*, 100% Duty Cycle (Each Side)	85 VDC 30 VDC**	<b>415-380V 60Hz 3 Phase</b> 27,000 watts peak, 20,000 watts continuous (dependent of weld output)	H: 1168 H: 1359 (top of exhaust) W: 724 D: 1765	Net: 917kg Ship: 939kg  *Additional: 75kg when fuel tank is full
	Paralleled (Combined)	40 – 800 A	700 A at 44 V*, 100% Duty Cycle 800 A at 38 V, 100% Duty Cycle				
CV/DC (MIG/FCAW)	Separate (Dual Outputs)	14 – 50 V	400 A at 34 V*, 100% Duty Cycle (Each Side)		<b>240V 60Hz 1 Phase</b> 5,500 watts peak, 4,000 watts continuous (independent of weld output)		
	Paralleled (Combined)	14 – 50 V	750 A at 40 V*, 100% Duty Cycle 800 A at 38 V, 100% Duty Cycle				

\* Meets NEMA and IEC ratings. \*\*VRD voltage for Stick & Sense voltage for Lift-Arc TIG. \*\*\*Will operate either 60Hz or 50/60Hz power tools, lights, etc.

## ENGINE SPECIFICATIONS

ENGINE BRAND	HP	TYPE	FEATURES	ENGINE SPEEDS	CAPACITIES	SOUND LEVELS AT 7 M	AUTOMATIC ENGINE SHUT DOWN
Deutz TD2011L04w	63.4	Turbo-charged four-cylinder, liquid-cooled industrial diesel	EPA Tier 4i compliant, includes oil pan and intake manifold heater	Idle: 1350 RPM Weld: 1800 RPM	Fuel: 95 L Oil: 10.4 L Coolant: Integrated Oil	<b>Idle:</b> 73.0 dB (97.8 Lwa), 77.2 dB at one metre from front panel  <b>Weld (800 A Load):</b> 81.7 dB (106.5 Lwa), 84.4 dB at one metre from front panel	Low Oil Pressure, High Coolant Temperature, Low Fuel Level

## COMPRESSOR SPECIFICATIONS

COMPRESSOR BRAND	FEATURES	FREE AIR DELIVERY	WORKING PRESSURE CONSTANT	DUTY CYCLE	OIL CAPACITY	AUTOMATIC COMPRESSOR SHUT DOWN
Ingersoll Rand CE55 G1	Rotary screw with electric clutch for on/off. Oil change intervals 500 hrs (same as engine). Life expectancy 30,000 hrs.	Idle: 40 cfm (1.13 m <sup>3</sup> /min) Weld: 60 cfm (1.70 m <sup>3</sup> /min)	100 PSIG 7 bar	100%	3.79 L	Oil Temperature



# Big Blue<sup>®</sup> 800X Air Pak with ArcReach Technology

Part No: MR907763-1 [Dual VRD]



## ORDERING INFORMATION - AVAILABLE BASE PACKAGES

### OPTION 1 - MIG/FLUX CORED SYSTEM

#### POWER SOURCE

MR907763-1 Big Blue 800X Air Pak with ArcReach Technology

#### WIREFEEDER (ALTERNATIVE WIREFEEDERS LISTED BELOW)

MR301456 ArcReach Suitcase 12

#### REQUIRED ACCESSORIES

Interconnecting lead kit for this option is not supplied by WIA

BEQ4015AH8EMC Bernard 440 Amp MIG gun with rotatable long 45 deg. neck, 4.6m cable, 1.2 tip

HA801AR Argon regulator & flow gauge

MR190300 0.9 / 1.2 mm "V" groove roll kit for solid wires

MR079607 1.2 mm knurled "V" groove roll kit for flux cored wires

MR079609 1.6 mm knurled "V" groove roll kit for flux cored wires

### OPTION 2 - RMD PULSE SYSTEM

#### POWER SOURCE

MR907763-1 Big Blue 800X Air Pak with ArcReach Technology

#### WIREFEEDER (ALTERNATIVE WIREFEEDERS LISTED BELOW)

MR301177 FieldPro Smart Feeder (Dinse) CE

#### REQUIRED ACCESSORIES

Interconnecting lead kit for this option is not supplied by WIA

BEQ4015AH8EMC Bernard 440 Amp MIG gun with rotatable long 45 deg. neck, 4.6m cable, 1.2 tip

HA801AR Argon regulator & flow gauge

MR190300 0.9 / 1.2 mm "V" groove roll kit for solid wires

MR079607 1.2 mm knurled "V" groove roll kit for flux cored wires

### OPTION 3 - MIG / FLUX CORED SYSTEM

#### POWER SOURCE

MR907763-1 Big Blue 800X with ArcReach Technology

#### WIREFEEDER (ALTERNATIVE WIREFEEDERS LISTED BELOW)

MR300615 22A wirefeeder - standard

#### REQUIRED ACCESSORIES

AM294-0/10 Interconnecting lead kit with earth leads - 10m dinse

BEQ4015AH8EMC Bernard 440 Amp MIG gun with rotatable long 45 deg. neck, 4.6m cable, 1.2 tip

HA801AR Argon regulator & flow gauge

MR190300 0.9 / 1.2 mm "V" groove roll kit for solid wires

#### OPTIONAL ACCESSORIES

MR242211020 RHC-14 remote hand current control

MR300430 Wireless hand control & 14 pin receiver

MR300429 Wireless foot control & 14 pin receiver

MR301325 ArcReach Stick/TIG Remote

BEQ4010AR8EMC 400 Amp MIG gun with fixed medium 45 deg neck 3.0m cable 1.2 tip